




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61B 1/00, A61M 25/01	A1	(11) International Publication Number: WO 92/03963 (43) International Publication Date: 19 March 1992 (19.03.92)
(21) International Application Number: PCT/US91/06107 (22) International Filing Date: 27 August 1991 (27.08.91) (30) Priority data: 581,591 12 September 1990 (12.09.90) US (60) Parent Application or Grant (63) Related by Continuation US 581,591 (CON) Filed on 12 September 1990 (12.09.90) (71)(72) Applicant and Inventor: ADAIR, Edwin, L. [US/US]; 2800 South University Boulevard, Denver, CO 80210 (US).	(74) Agent: FIELDS, Gary, D.; Fields, Lewis, Pittenger & Rost, 1720 South Bellaire Street, Suite 1100, Denver, CO 80222 (US). (81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (Eu- ropean patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European pa- tent), NL (European patent), SE (European patent), US. Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>	

(54) Title: DEFORMABLE AND REMOVABLE SHEATH FOR OPTICAL CATHETER

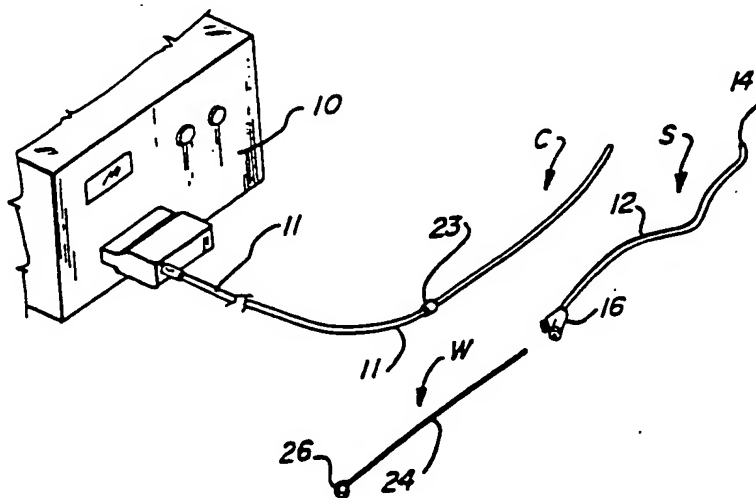

(57) Abstract

A deformable sheath (S) for an optical catheter includes an elongated, deformable hollow body (12) having a normal predetermined shape which is compatible with its intended use in situ in a passageway in the patient. The body (12) has a distal end (14) and a proximate end (16) with a plurality of channels extending therebetween. An optical catheter (C) extends through one (28) of the channels in the body, having a distal end aligned with the distal end of the body and a proximate end extending outwardly beyond the proximate end of the body, the catheter assuming the normal shape of the body. A substantially rigid guide wire (W) is extendable through a second (20) of the channels to straighten the body during insertion of the sheath into a passageway within the patient. This guide wire (W) is removable from the body after insertion so that the body resumes its normal predetermined shape. The sheath can include a third channel for insertion of a laser fiber (30) for laser lithotripsy or an electrohydraulic probe to fracture stones. A lock coupler (22) is attached to the proximate end (16) of the body (12) for attachment to a fitting to properly align and connect the sheath and its catheter and other instruments with external instrumentation.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	CN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LJ	Liechtenstein	SU ⁺	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TC	Togo
DE ⁺	Germany	MC	Monaco	US	United States of America
DK	Denmark				

⁺ Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

-1-

DEFORMABLE AND REMOVABLE SHEATH FOR OPTICAL CATHETERTechnical Field

05 The present invention relates to a deformable and removable sheath and more particularly to a deformable and removable sheath for use with an optical catheter which can be straightened by a guide wire for insertion in the passageway leading to a body cavity of a patient and can be returned to its original shape after insertion by removal of the guide wire.

10 Background Art

Most optical catheters on the market today are made in a conventional manner wherein they include an elongated body or shaft containing both image fibers and light carrying fibers. The catheter may also have additional passageways for irrigation and/or for conducting operative or investigative procedures. Sometimes it also will be provided with a steering mechanism for pointing the distal end thereof. Most optical catheters are configured in a shape to do one specific examination. For example, one may be a flexible cysto-urethroscope for examination of the lower genitourinary tract. Another may be a bronchoscope for looking into the respiratory tract. Still another may be a flexible hysteroscope for looking into the uterus. Once any of these devices is manufactured, it is locked into that configuration and generally can only be used for the purpose for which it was constructed. In other words, it is not adaptable for other types of examinations. An exception to this is that in rare instances one may use a flexible hysteroscope for looking into the bladder. If this is done only because the regular

-2-

scope is broken or unavailable, or done by mistake. There also is a device now available for looking the nasal sinuses. This is a small flexible scope which has an eyepiece, a steering mechanism for changing direction of the device to allow its manipulation into a sinus opening and a light connector. However, it cannot be used for any other purpose.

Because of the necessity for providing a variety of types and styles of catheters, the cost invested in optical catheters can be quite high, inasmuch as they are not interchangeable.

Disclosure of the Invention

A deformable sheath for an optical catheter is provided which includes an elongated, deformable hollow body having a normal predetermined shape which is compatible with its intended use in situ in a passageway in the patient. The body has a distal end and a proximate end with a plurality of channels extending therebetween. An optical catheter extends through one of the channels in the body, having a distal end aligned with the distal end of the body and a proximate end extending outwardly beyond the proximate end of the body, the catheter assuming the normal shape of the body. A substantially rigid guide wire is provided which is extendable through a second of the channels to straightened the body during insertion of the sheath into a passageway within the patient. This guide wire is removable from the body after insertion so that the body resumes its normal predetermined shape. The sheath can include a third channel for insertion of a laser fiber or laser lithotripsy or an electrohydraulic probe to fracture stones. A lock coupler is attached to the proximate end of the body for attachment to a fitting to

-3-

properly align and connect the sheath and its catheter to external instrumentation.

05 The guide wire can comprise a long slender body having a distal end and a proximate end receivable in the sheath body. A handle is attached to the proximate end of the guide wire body to aid in inserting and withdrawing the guide wire from the sheath.

10 With this invention, it can be seen that deformable sheaths of the type just described can be provided each having a different natural shape depending on its intended use. The catheter, which is quite expensive, can be removed from one sheath after use for one purpose and inserted in another sheath for use for another purpose. The sheath, which is inexpensive, 15 can be disposable to minimize the transfer of disease or infection from one patient to the next.

Additional advantages of this invention will become apparent from the description which follows, taken in 20 conjunction with the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a perspective view showing a deformable and removable sheath and guide wire constructed in accordance with this invention for use with an optical 25 catheter attached to a console;

Figure 2 is a perspective view of the deformable and removable sheath of Figure 1 with the guide wire in place;

Figure 3 is a perspective view of the deformable and removable sheath with the guide wire removed; 30

Figure 4 is an enlarged vertical section, taken along line 4-4 of Figure 2, showing the interior of the guide wire with the sheath and catheter in place; and

-4-

Figure 5 is an enlarged perspective view of the proximate end of the deformable and removable sheath.

Best Mode For Carrying Out the Invention

05 In accordance with this invention, a sheath S is provided which may have a preformed shape as shown in Figure 1 which is compatible with the shape of the passageway of a patient in which it is to be used. This sheath S can be slid over catheter C which is removably connected to a console 10, such as the type shown in U.S. Patent No. 4,589,404. Since the catheter is flexible, it will assume the shape of sheath S when inserted therein. However, for insertion of the catheter and sheath into the passageway of the patient, a guide wire W is provided. Conveniently, the sheath S has a body 12 which has an open distal end 14 and a connector 16 at the proximate end. As best seen in Figure 5, connector 16 has a central opening 18 for receiving the catheter C and a side opening 20 for receiving guide wire W. The central opening 18 is formed in a lock coupler in the form of a female luer lock 22 to allow attachment to a fitting which has a male luer adaptor so that the catheter will be positioned in a fixed position within the sleeve. The side opening 20 can receive the body 24 of guide wire W which is inserted and withdrawn by means of handle 26 on the proximate end thereof. Once inserted the guide wire W will straighten out the sheath to the position shown in Figure 2 for easy insertion into a passageway in a patient's body.

30 As best seen in Figure 4, catheter C is received in a channel 28 within sheath body 12. Conveniently, channel 28 can also receive devices, such as a laser fiber 30 for lithotripsy. Similarly, an irrigation passageway 32 can be provided. A fiber optic bundle 34 is also provided which may include one or more

-5-

optic fibers for transmitting light from console 10 to the distal end of the catheter C to illuminate the site under investigation. In addition, bundle 34 will contain coherent fibers to project an image to a video screen (not shown) associated with console 10. When inserted, these elements will extend through channel 28 to the distal end 14 of sheath S. Once the sheath with the catheter and guide wire have been inserted into the passageway of the patient so that the distal end 14 of the sheath is properly positioned within a body cavity for observation and/or treatment, guide wire W is withdrawn and the sheath returns to its normal position, as shown in Figures 1 and 3 which conforms to the particular passageway for which it was designed. Of course, if observation and/or treatment is desired in a different bodily passageway, then a different sheath will be used with the same catheter and guide wire in the manner just described.

It will be understood from the foregoing, that preformed sleeves can be provided which are made of any shape, any diameter and almost any length. The shape given to the sleeve is dependant upon its use. For example, one curve is imparted to the body of the sheath for viewing the inside upper pole calys of the kidney. Still another shape is given to a sleeve for use with a catheter for viewing the inside of the middle calys. Still a third shape is used for viewing the inside lower calys of the kidney.

This invention has been described in detail with reference to a particular embodiment thereof, but it will be understood that various other modifications can be effected within the spirit and scope of this invention.

-6-

CLAIMS

In the Claims:

1. Apparatus having a deformable and removable sheath, for use with an optical catheter wherein said sheath with a catheter therein is to be positioned in a passageway leading to a body cavity of a patient for
05 observation and/or treatment, said apparatus comprising:

an elongated, deformable, hollow body having a normal predetermined shape which is compatible with its intended use in situ, said body having a distal
10 end, a proximate end and a plurality of channels extending from said proximate end to said distal end;

an optical catheter extendable through one of said channels in said body, having a distal end aligned with said distal end of said body and a
15 proximate end extending outwardly beyond said proximate end of said body, said catheter assuming the normal shape of said body; and

a substantially rigid guide wire extendable through a second of said channels to straighten said
20 body during insertion of said sheath in the passageway of the patient and removable from said body after insertion so that said body resumes its normal predetermined shape in the passageway.

2. Apparatus, as claimed in Claim 1, further including:

a third channel for insertion of additional devices, such as a laser fiber for laser lithotripsy
05 or an electrohydraulic probe to fracture stones; and

a lock coupler attached to said proximate end of said body for attachment to a fitting to properly align and connect said sheath and its catheter and other instruments with external instrumentation.

-7-

3. Apparatus, as claimed in Claim 2, wherein said lock coupler includes:

a central opening for receiving the catheter;

and

05

a side opening for receiving the guide wire.

4. Apparatus, as claimed in Claim 1, wherein:

said guide wire comprises:

a long, slender, substantially rigid body, having a distal end and a proximate end, receivable in

05

said sheath body; and

a handle attached to said proximate end of said guide wire body to aid in inserting and withdrawing said guide wire from said sheath.

5. Apparatus, as claimed in Claim 1, wherein:
said sheath is disposable after each use.

6. A method of using an optical catheter in successive investigative and/or operative procedures, said method comprising the steps of:

05 inserting a flexible optical catheter into an elongated sheath;

inserting the sheath with the catheter in place therein into a passageway in the body of the patient;

10 causing the sheath to assume a desired shape or orientation to properly position the catheter;
conducting an investigative and/or operative procedure;

15 removing the used sheath with the catheter in place therein from the passageway in the body of the patient;

-8-

removing the catheter from the used sheath;
and
disposing of the used sheath.

7. A method, as claimed in Claim 6, including the further steps of:

inserting the catheter in a new sheath; and
repeating the steps of Claim 6.

8. A method of using an optical catheter in successive investigative and/or operative procedures, said method comprising the steps of:

inserting a stiff wire into a flexible,
05 elongated sheath, which has a predetermined curved shape which conforms to a specific passageway in the body of a patient, to straighten the sheath;

inserting a flexible optical catheter into the sheath along side of the wire;

10 inserting the sheath with the wire and catheter in place therein into a passageway in the body of a patient having the same shape as the predetermined curve of the sheath;

removing the wire from the sheath so that the
15 sheath and the catheter therein return to the predetermined shape of the sheath which now conforms with the shape of the passageway;

conducting an investigative and/or operative procedure;





20 removing the used sheath with the catheter in place therein from the passageway in the body of the patient;

removing the catheter from the used sheath;
and

25 disposing of the used sheath.

-9- .

9. A method, as claimed in Claim 8, including the further steps of:
inserting the catheter in a new sheath; and
repeating the steps of Claim 8.

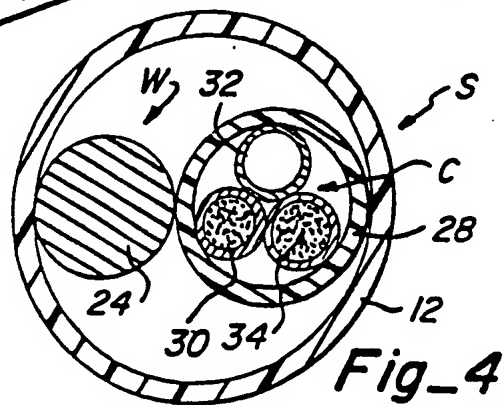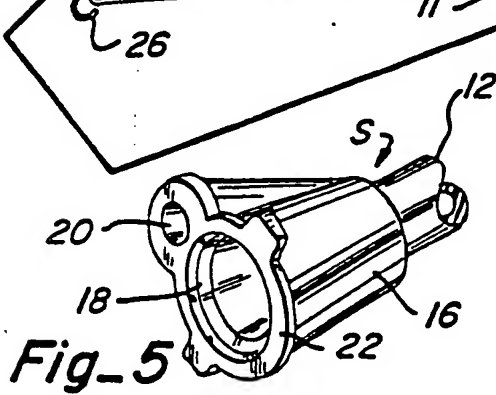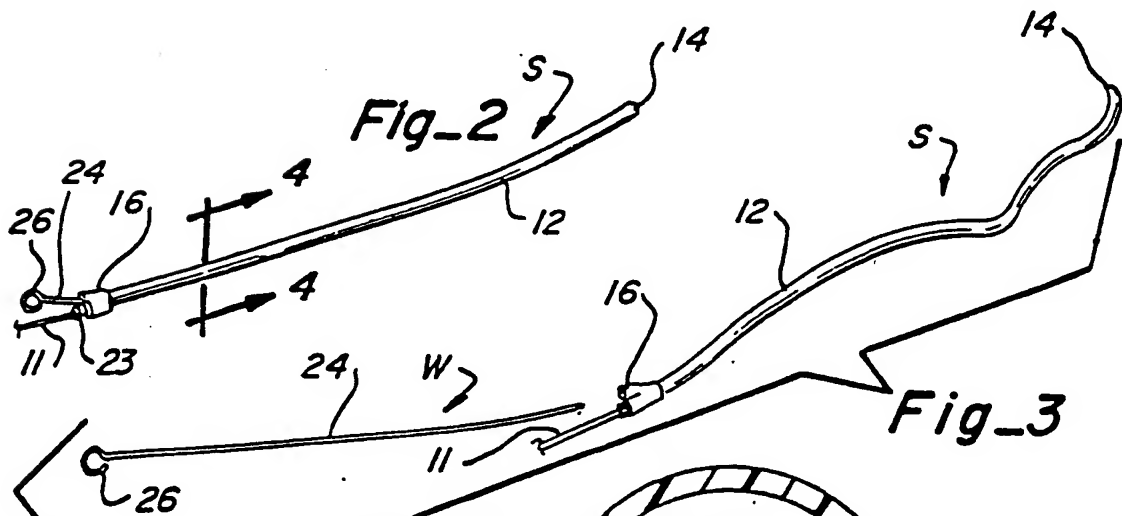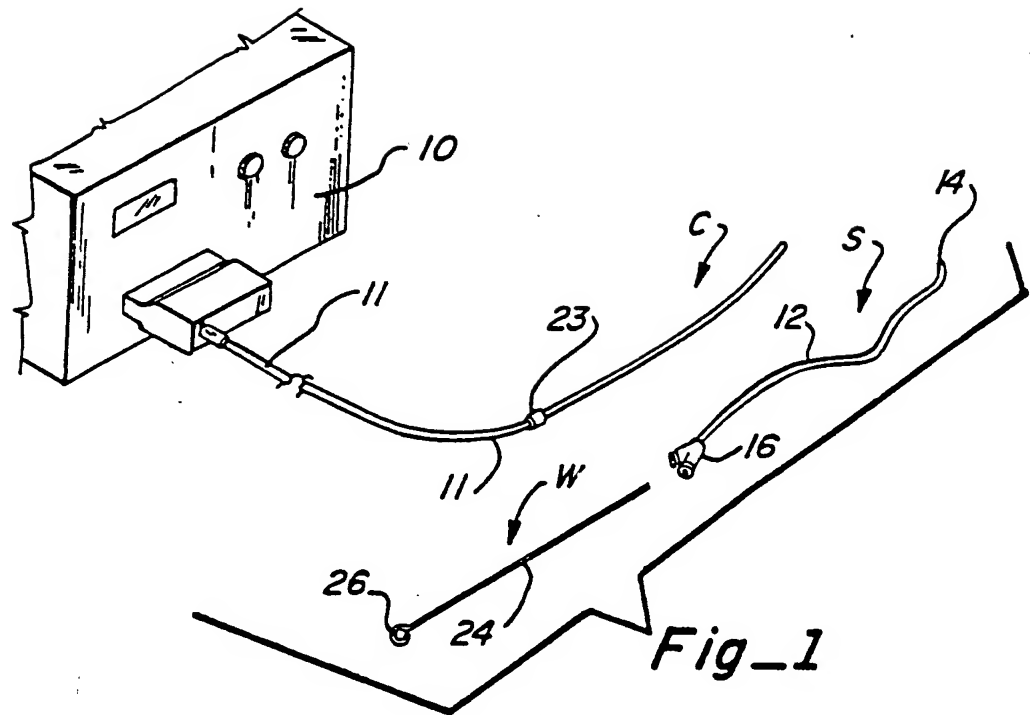

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
X,P	FR,A,2 653 657 (R. & N. CROISY) 3 May 1991 see page 2, line 30 - page 6, line 15 see figures 1-3 ---	1,2,4,6

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 91/06107

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 A61B1/00; A61M25/01						
II. FIELDS SEARCHED <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Minimum Documentation Searched⁷</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; border-bottom: 1px solid black;">Classification System</td> <td style="border-bottom: 1px solid black;">Classification Symbols</td> </tr> <tr> <td style="border-bottom: 1px solid black;">Int.Cl. 5</td> <td style="border-bottom: 1px solid black;">A61B ; A61M</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched⁸</div>			Classification System	Classification Symbols	Int.Cl. 5	A61B ; A61M
Classification System	Classification Symbols					
Int.Cl. 5	A61B ; A61M					
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹						
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³				
X	US,A,4 882 777 (O.S. NARULA) 21 November 1989 see column 5, line 30 - column 6, line 29 ---	1,4,6,8				
X	EP,A,0 132 344 (PURDUE RESEARCH FOUNDATION) 30 January 1985 see page 6, line 12 - page 7, line 36 ---	1,4,6,8				
Y	EP,A,0 347 170 (INDIANAPOLIS CENTER) 20 December 1989 see column 1, line 1 - column 4, line 49 ---	1-3,6,8				
A		4				
Y	US,A,4 589 404 (J.D. BARATH ET AL.) 20 May 1986 cited in the application see column 3, line 1 - line 11; figures 1,2,8-10 see column 4, line 26 - column 6, line 50 ---	1-3,6,8				
	-/-					
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>						
IV. CERTIFICATION						
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report					
16 DECEMBER 1991	24. 01. 92					
International Searching Authority	Signature of Authorized Officer					
EUROPEAN PATENT OFFICE	RIEB K.D.					

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. US 9106107
SA 52499**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 16/12/91

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4882777	21-11-89	None	
EP-A-0132344	30-01-85	AU-A- 3072484 JP-A- 60036034	24-01-85 25-02-85
EP-A-0347170	20-12-89	US-A- 4986814 JP-A- 2237573	22-01-91 20-09-90
US-A-4589404	20-05-86	DE-A- 3485019 EP-A, B 0148034 EP-A- 0281161 US-A- 4754328	10-10-91 10-07-85 07-09-88 28-06-88
FR-A-2653657	03-05-91	None	

THIS PAGE BLANK (USPTO)